BG Pulse Journal USA
ISSN:1947-2536 http://www.bgpulseusa.com/index.php/bg

INVESTIGATING THE INTERACTION AND MIXING PROCESSES OF TWO CURRENTS

Abdukhamidov S.K.
Tashkent State Transport University.
Yuldashev S.
Tashkent University of Applied Sciences, Department of "Digital and Fundamental Sciences"
E-mail: Sardor.abdukhamidov@mail.ru
https://doi.org/10.5281/zenodo.20622033

Abstract: The mixing of two flat flows is a fundamental concept in fluid dynamics with numerous applications in engineering and environmental sciences. This paper investigates the mechanics, efficiency, and theoretical principles of the mixing process in two-dimensional (2D) flows. Emphasis is placed on understanding the physical behavior of the mixing process, its mathematical modeling, and its practical implications. The study is aimed at enhancing the predictability and controllability of flat flow systems in various industrial and environmental scenarios. The results highlight factors affecting flow stability and mixing efficiency and suggest improvements for optimizing such processes.

Keywords: Flat flows, two-dimensional mixing, fluid dynamics, vortex dynamics, Reynolds number, shear flow, turbulence, laminar flow.

Introduction

Mixing processes are vital in many natural and industrial contexts, ranging from chemical engineering to environmental flow systems. Specifically, the mixing of two flat, two-dimensional flows (also referred to as planar flows) is of interest in various sectors, such as microfluidics, combustion, and air-pollution control. A flat flow refers to fluid motion constrained within a plane, where the flow variables depend only on two spatial coordinates, making it an idealized but instructive model for real-world applications.


The efficiency of mixing in such systems is governed by a variety of factors, including the velocity gradients between the two flows, the flow's initial conditions, and the physical boundaries involved. Viscous diffusion, advection, and turbulence all play crucial roles in how effectively two flows merge. This paper aims to analyze the theoretical aspects of mixing in flat flows, model the process mathematically, and identify key parameters that enhance or hinder the mixing efficiency.

The dynamics of mixing involve the interaction of shear layers, the generation of vortices, and the development of instabilities that promote flow uniformity over time. These phenomena can be modeled using fundamental fluid mechanics principles, particularly the Navier-Stokes equations. Depending on the nature of the flows involved-whether laminar or turbulent-the characteristics of mixing can vary significantly, and this paper aims to cover both regimes.

A mixing layer is formed when two fluid streams with different velocities or densities contact each other. The interface between two fluids is subject to complex flow phenomena such as turbulence, mixing and swirl. Understanding and accurate prediction of the behavior of the mixing layer is important in a variety of applications including combustion, chemical reactions, and flows

in surrounding medium. In the framework of the two-fluid model, this problem was solved numerically in [32]. However, in that article, the control volume method and the *SIMPLE* algorithm were used for the numerical solution.

This problem was well studied experimentally. In the experiment, a 3 mm thick separating plate in a 300 mm wide tunnel was used. The end of the plate is located at the point x = 0, and two fluid flows with different velocities merge below this point. The plate is modeled with a taper starting at x = -50 mm and ending with a trailing edge thickness of 0.3 mm at x = 0. In the experiment, the upper high-velocity flow has a boundary layer thickness of about 9 .6 mm at x = -10 mm (near the trailing edge of the plate) and a pulse thickness of about 1 mm. The lower flow with lower velocity has a boundary layer thickness of about 6.3 mm and a pulse thickness of about 0.73 mm. The Reynolds number based on L (1 mm, which corresponds to the length of "1" grid) is 2900. The temperature of the airflow is T_{ref} = 293, K = 528 R and the velocity of sound a_{ref} = 343 m/s. The static pressure p_{ref} is equal to atmospheric pressure (101325 Pa). Free stream velocities are 41.54 m/s at the top and 22.40 m/s at the bottom. If this is applicable to the particular turbulence model, this case should be considered with a low level of free stream turbulence. In the experiment, Tu was about 0.3%. The boundary conditions are shown in Fig. 10a, and an illustration of the computational grid and computational domain is shown in Fig. 10b.

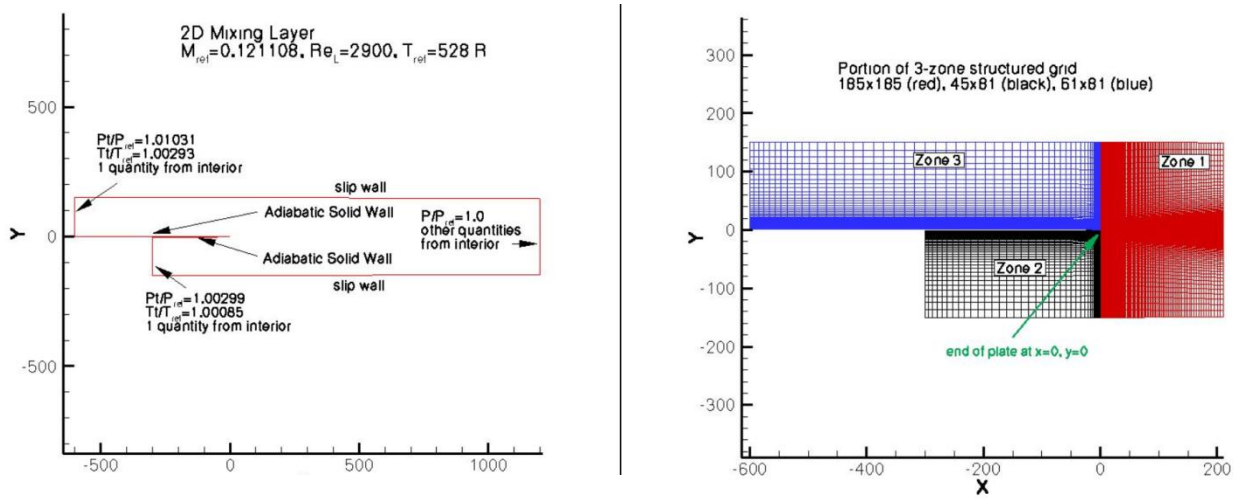

a) b)

Fig. 10. 2D Mixing layer. a) boundary conditions and b) computational grid and area.

In Fig. 10, P_t refers to total pressure, P refers to static pressure, and T_t refers to total temperature.

Figure 11 shows graphs of the dimensionless longitudinal velocity in various sections of the channel based on the results of turbulence models. Experimental data are also given for comparison. The figures show the profiles of the axial U-velocity component in different sections of the channel. Here U_1=22.40 m/s, ΔU=19.14 m/s and δw=5.236 mm at x=1 mm, δw=8.85 mm at x=50 mm, δw=13.771 mm at x=200 mm, δw=35.894 mm at x=650 mm, and δw=50.547 mm at x=950 mm.


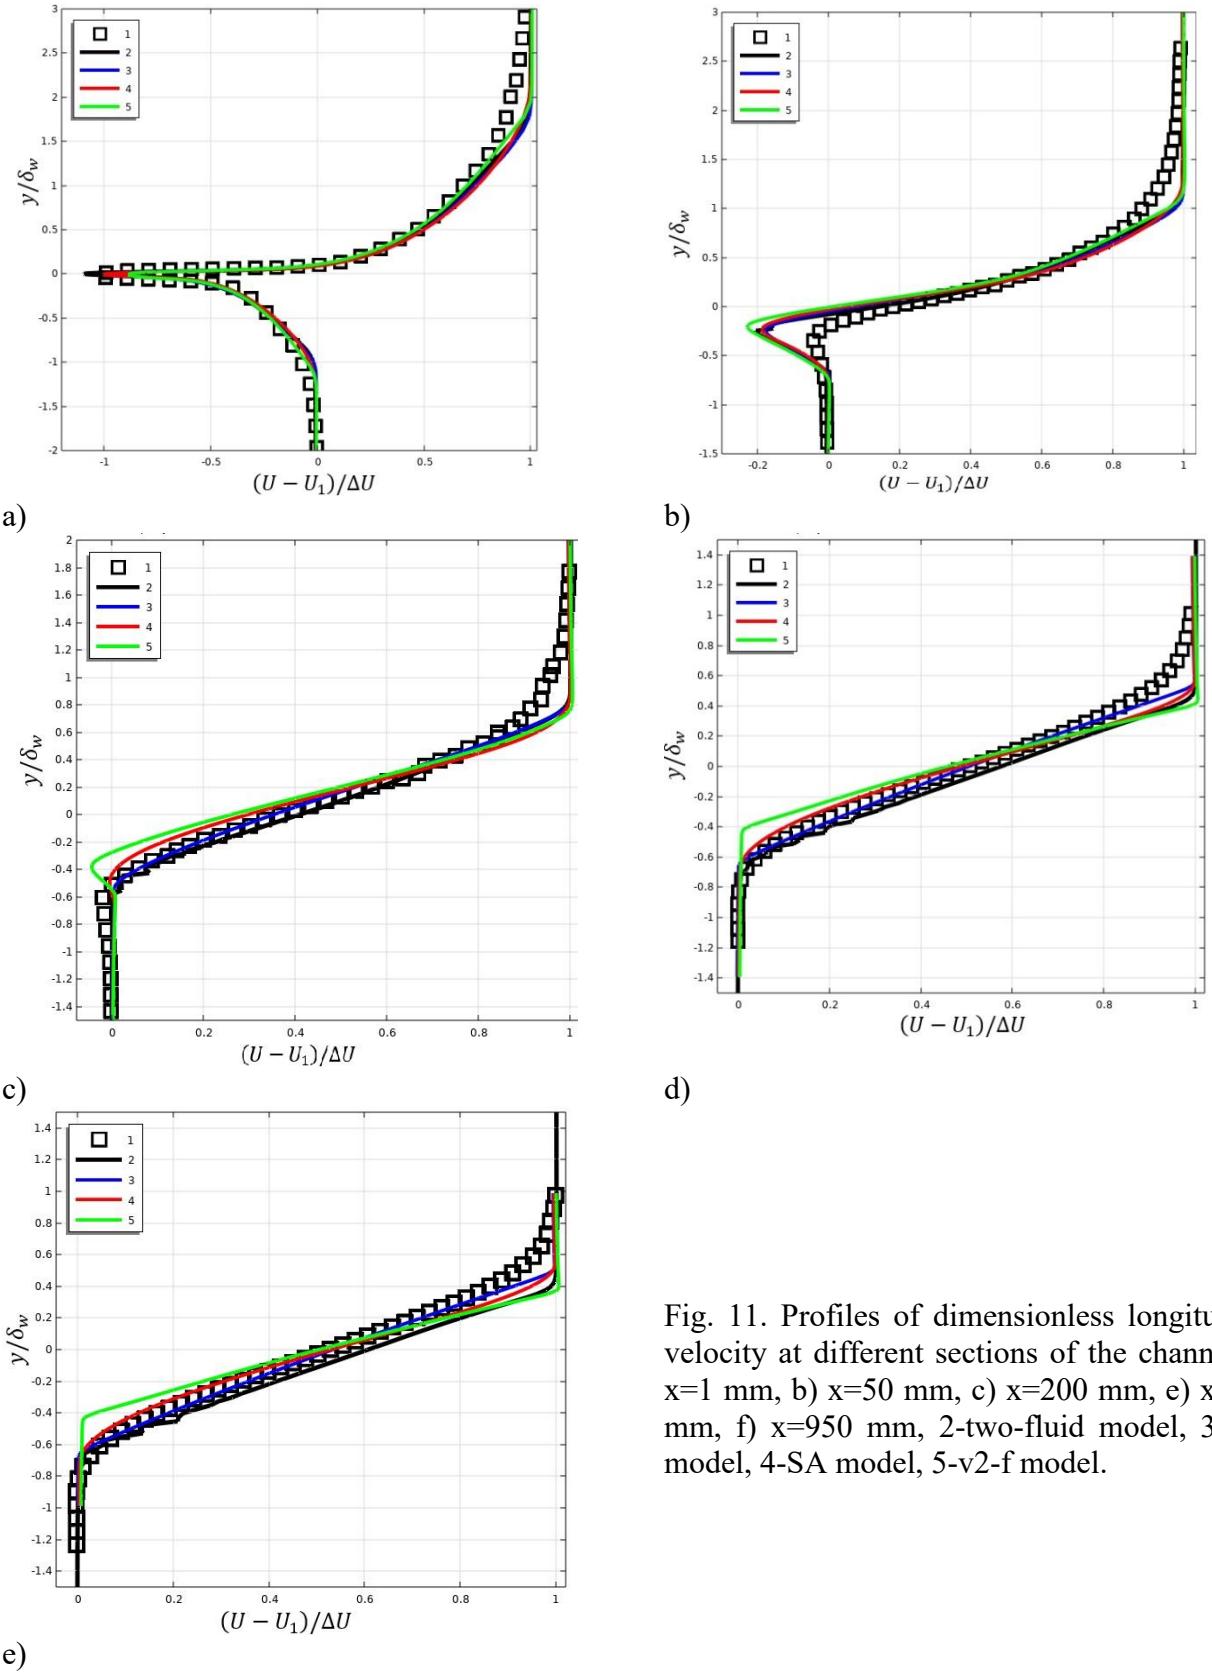


Fig. 11. Profiles of dimensionless longitudinal velocity at different sections of the channel. a) x=1 mm, b) x=50 mm, c) x=200 mm, e) x=650 mm, f) x=950 mm, 2-two-fluid model, 3-SST model, 4-SA model, 5-v2-f model.


BG Pulse Journal USA
ISSN:1947-2536 http://www.bgpulseusa.com/index.php/bg

The results in the x=1 mm section of all turbulence models describe the flow well. The velocity at x=50 mm lags significantly behind the experiment at the breaking point. In sections from x=200 mm up to 950 mm, the results of the two-fluid model and SST are better than the results obtained using other models.


Figure 12 shows the numerical results of the turbulence model and experiment for turbulent stress $\overline{u'\vartheta'}$ profiles at sections a) x=200 mm, b) 650 mm, c) 950 mm.

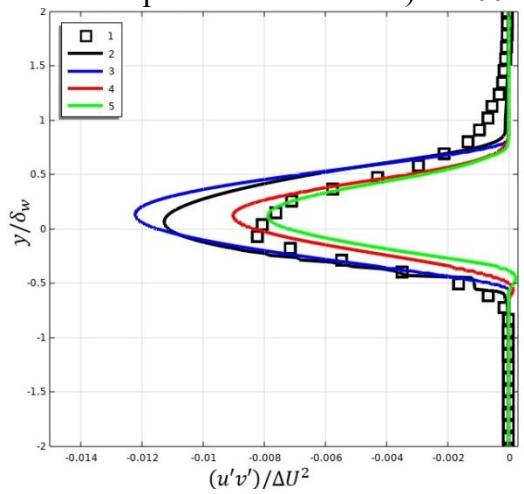

a)

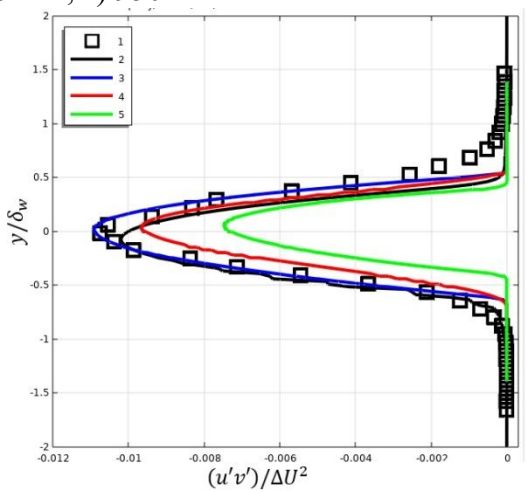


b)

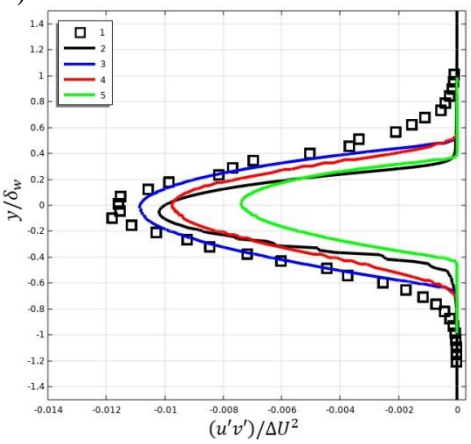

c)

Fig. 12. Profiles of turbulent stresses $\overline{u'\vartheta'}$. a) x=200 mm, b) x=650 mm, c) x=950 mm, 1-experiment, 2-two-fluid model, 3-SST model, 4-SA model, 5-v2-f model.


As can be seen from Fig. 12, the turbulent stresses $\overline{u'\vartheta'}$ in the section x=200 mm, the results of the SA and v2-f models are in good agreement with the experimental ones, and the results of the two-fluid model and SST are 1.5 times greater than the experiment. In other sections, the results of the models can be considered satisfactory. Figure 13 shows the results of the two-fluid model for turbulent stresses $\overline{u'u'}$ and $\overline{v'v'}$.

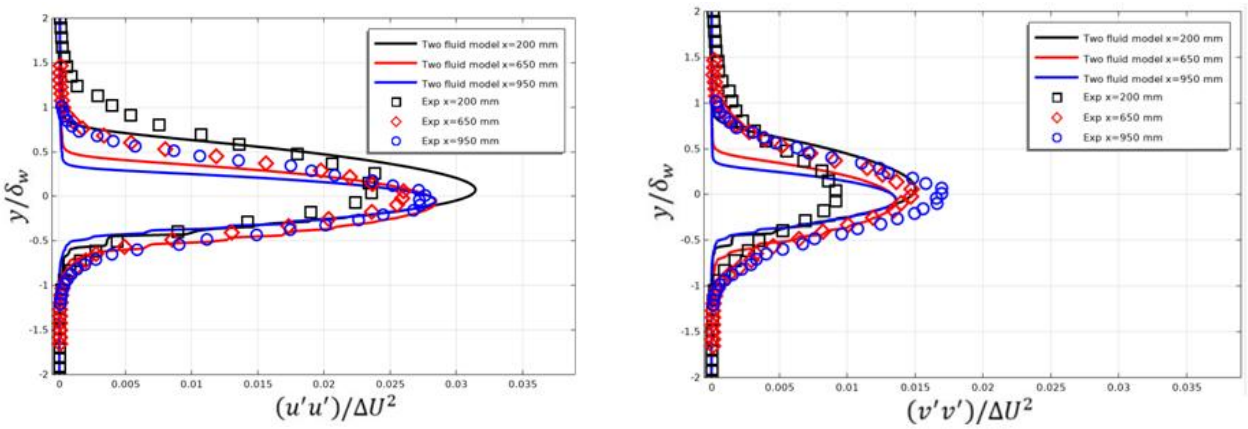

a) b)

Fig. 13. Profiles of turbulent stresses.

In Fig. 14, contours for the longitudinal velocity and turbulent stresses are presented for the two-fluid model.

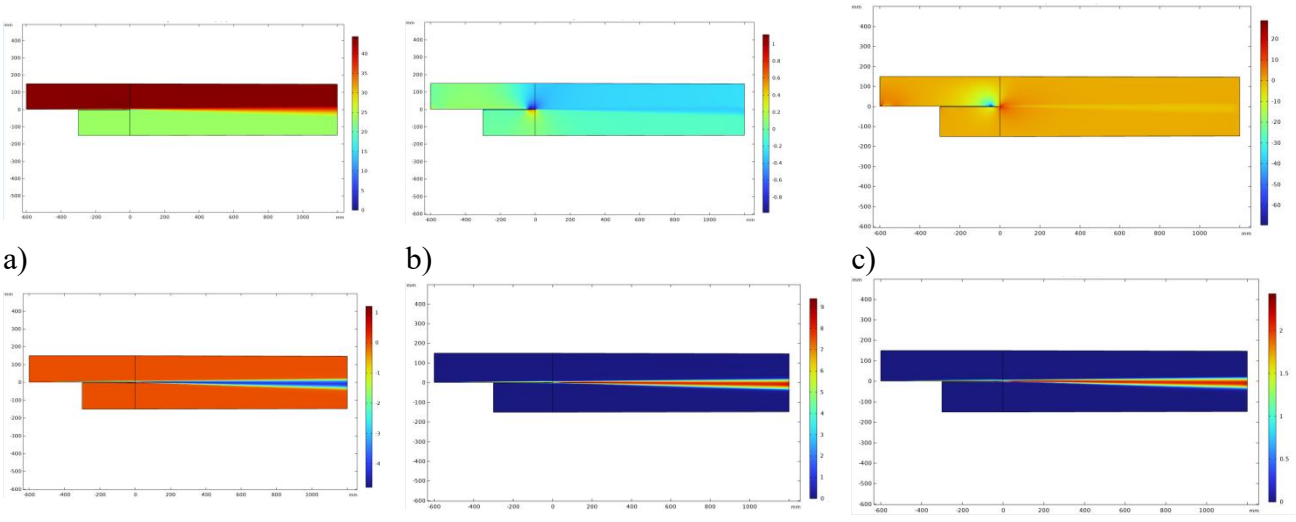

a) b) c)

d) e) f)

Fig. 14. Isolines of a) longitudinal velocity –U, b) transverse velocity–V, c) pressure–p, turbulent stress d) $\overline{u'v'}$, e) $\overline{u'u'}$, f) $\overline{v'v'}$.

Results and Discussion

Laminar Flow Mixing: In laminar regimes, the mixing process is primarily governed by viscous diffusion, and the interface between the two flows remains smooth. The mixing efficiency can be modeled by solving the advection-diffusion equation. It was observed that the rate of mixing is slow and highly dependent on the velocity gradient at the interface. In this regime, shear stress plays a significant role in how quickly the two flows integrate.

Turbulent Flow Mixing: As the Reynolds number increases, instabilities arise, and the flow transitions to turbulence. In turbulent mixing, eddies and vortices form, enhancing the mixing process through chaotic advection. Large-scale coherent structures such as vortices tend to stretch and fold the flow, increasing the area of contact between the two streams and promoting faster

homogenization. The Kolmogorov scale, representing the smallest eddies in turbulent flow, was crucial for understanding the efficiency of mixing in this regime.

Vortex Dynamics and Shear Flow: The generation of vortices and the behavior of shear layers were central to the study of flat flow mixing. The formation of Kelvin-Helmholtz instabilities in regions of high velocity gradient between the two flows significantly influenced the mixing rate. These instabilities developed into roll-up vortices, which increased the efficiency of the process. Vortex shedding from the boundaries of the flow also played an essential role in mixing enhancement.

Practical Implications: Understanding flat flow mixing is critical in applications such as pollutant dispersion in atmospheric boundary layers, mixing in microfluidic devices, and the design of heat exchangers. In environmental contexts, flat flow mixing models help predict the transport and diffusion of contaminants in water bodies and the atmosphere.

Conclusion

The mixing of two flat flows is a complex process influenced by various physical parameters such as Reynolds number, velocity gradients, and boundary conditions. In laminar flows, mixing is dominated by diffusion and occurs slowly. In contrast, turbulent flows feature enhanced mixing through chaotic advection and the presence of vortices. Vortex dynamics and shear instabilities are pivotal in promoting mixing in both laminar and turbulent regimes. By understanding these mechanisms, it is possible to design systems that optimize mixing efficiency for industrial, environmental, and engineering applications.

References.

[1]. Orozco Murillo, W., Palacio-Fernande, J. A., Patiño Arcila, I. D., Zapata Monsalve, J. S., & Hincapié Isaza, J. A. (2020). Analysis of a Jet Pump Performance under Different Primary Nozzle Positions and Inlet Pressures using two Approaches: One Dimensional Analytical Model and Three Dimensional CFD Simulations. Journal of Applied and Computational Mechanics, 6 (Special Issue), 1228-1244.

[2]. Kozelkov, A. S., & Kurulin, V. V. (2015). Eddy-resolving numerical scheme for simulation of turbulent incompressible flows. Computational Mathematics and Mathematical Physics, 55, 1232-1241.

[3]. Volkov, K. N., Emel'yanov, V. N., & Karpenko, A. G. E. (2015). Preconditioning of Navier–Stokes equations in the computation of free convective flows. Computational Mathematics and Mathematical Physics, 55, 2080-2093.

[4]. Babakov, A. V. (2016). Program package FLUX for the simulation of fundamental and applied problems of fluid dynamics. Computational Mathematics and Mathematical Physics, 56, 1151-1161.

[5]. Spalart, P. R., and Venkatakrishnan, V., "On the Role and Challenges of CFD in the Aerospace Industry," Aeronautical Journal, Vol. 120, No. 1223, 2016, pp. 209–232. doi:10.1017/aer.2015.10

[6]. Kozelkov, A. S., Krutyakova, O. G. L., Kurulin, V. V., Lashkin, S. V., & Tyatyushkina, E. S. (2017). Application of numerical schemes with singling out the boundary layer for the computation of turbulent flows using eddy-resolving approaches on unstructured grids. Computational Mathematics and Mathematical Physics, 57, 1036-1047.

[7]. Boussinesk J., Essai sur la théorie des eaux courantes.-Paris: Mémoires présentées par diverses savants à l'Acad. D. Sci., 1877, v. 23.

[8]. Kolmogorov A.N. // Reports of the Academy of Sciences of the USSR, 1941, 30, No. 4, P.299.

[9]. Prandtl L. Untersuchungen zur ausgebildeteTurbulenz.-Zeitschr. f. Angew. Math. u. Mech., 1925, v. 5.

[10]. Karman Th. Mechanische Ahnlichkeit und Turbulenz. – Nachr. d. Gesellsch. d. Wissen. Zu Gottingen, Math. Phys. Kl., 1930.
[11]. "Turbulence modeling Resource. NASA Langley Research Center", http://turbmodels.larc.nasa.gov.
[12]. Spalart P. R., Allmaras S. R. "Aone-equation turbulence model for aerodynamic flows". AIAA Paper 1992-0439.
[13]. Menter F. R. "Zonal two-equation k-ω turbulence models for aerodynamic flows". AIAAPaper 1993-2906.
[14]. Menter F. R., Kuntz M., and Langtry R. "TenYears of Industrial Experience with the SST Turbulence Model". Turbulence, Heat and Mass Transfer 4, ed: K. Hanjalic, Y. Nagano, and M. Tummers, Begell House, Inc., 2003, pp. 625 - 632.
[15]. Pasha, A. A. (2018). Study of parameters affecting separation bubble size in high speed flows using k-ω turbulence model. Journal of Applied and Computational Mechanics, 4(2), 95-104.
[16]. Spalart P.R., Shur, M.L. On the sensitization of turbulence models to rotational and curvature. AerospaceScience and Technology. 1997. Vol. 1, No. 5., 297-302.
[17]. Slotnick, J., Khodadoust, A., Alonso, J., Darmofal, D., Gropp, W., Lurie, E., and Mavriplis, D., "CFD Vision 2030 Study: A Path to Revolutionary Computational Aerosciences," NASA CR-2014-21878, March 2014, http://ntrs.nasa.gov/search.jsp?R=20140003093 [retrieved 2019].
[18]. Abbas-Bayoumi, A., and Becker, K., "An Industrial View on Numerical Simulation for Aircraft Aerodynamic Design," Journal of Mathematics in Industry, Vol. 1, No. 1, 2011, Paper 10. doi:10.1186/2190-5983-1-10
[19]. Spalart, P. R., Jou, W. H., Strelets, M., and Allmaras, S. R., "Comments on the Feasibility of LES for Wings and on a Hybrid, RANS/LES Approach," Advances in DNS/LES, Proceedings of 1st AFOSR International Conference on DNS/LES, Vol. 1, Greyden Press, Columbus, 1997, pp. 137–147
[20]. Malikov Z. "Mathematical Model of Turbulence Based on the Dynamics of Two Fluids". Applied Mathematical Modeling. V.82, P. 409-436. 2020
[21]. Malikov Z. M., Madaliev M. E. Numerical simulation of separated flow past a square cylinder based on a two-fluid turbulence model //Journal of Wind Engineering and Industrial Aerodynamics. – 2022. – V. 231. – P. 105171.
[22]. Arif, M. S., Afzal, M. J., Javaid, F., Tayyaba, S., Ashraf, M. W., Toki, G. I., & Hossain, M. K. (2022). Laminar Flow Analysis of NACA 4412 Airfoil Through ANSYS Fluent.
[23]. Musham, S., Prasanna, S. V. S. N. D. L., & Suresh Kumar, N. (2020). Simulation of flow Characteristics of NACA 0015 airfoil using ANSYS-CFD. Solid State Technology, 63(4), 1877-1885.
[24]. Georgescu, A. M., Georgescu, S. C., Bernad, S., & Coşoiu, C. I. (2007, June). COMSOL Multiphysics versus Fluent: 2D numerical simulation of the stationary flow around a blade of the Achard turbine. In Proceedings of the 3rd Workshop on Vortex Dominated Flows (Vol. 52, No. 66, pp. 13-21).
[25]. Khairani, C., & Marpaung, T. J. (2019, November). Computational analysis of fluid behaviour around airfoil with Navier-Stokes equation. In Journal of Physics: Conference Series (Vol. 1376, No. 1, p. 012003). IOP Publishing.
[26]. G. Hauke and T.J.R. Hughes, "A comparative study of different sets of variables for solving compressible and incompressible flows," Computer Methods in Applied Mechanics and Engineering, vol. 153, pp. 1–44, 1998.

[27]. Franca, L. P., & Do Carmo, E. G. D. (1989). The Galerkin gradient least-squares method. Computer Methods in Applied Mechanics and Engineering, 74(1), 41-54.
[28]. Hughes T.J.R., Franca L.P., Hulbert G.M. A new finite element formulation for computational fluid dynamics: VIII. The Galerkin-least-squares method for advective-diffusive equations. Comput. Meth. Appl. Mech. Eng., 1989, vol. 73, pp. 173-189.
[29]. Franca L.P., Frey S.L., Hughes T.J.R. Stabilized finite element methods: I. Application to the advective-diffusive model. Comput. Meth. Appl. Mech. Eng., 1992, vol. 95, pp. 253-276.
[30]. Smits, A. J., Young, S. T. B., Bradshaw, P. "The Effect of Short Regions of High Surface Curvature on Turbulent Boundary Layers," J. Fluid Mech., Vol. 94, Part 2, 1979, pp. 209-242, https://doi.org/10.1017/S0022112079001002.
[31]. Delville, J., Bellin, S., Garem, J. H., & Bonnet, J. P. (1989). Analysis of Structures in a Turbulent, Plane Mixing Layer by Use of a Pseudo Flow Visualization Method Based on Hot-Wire Anemometry. Advances in Turbulence 2, 251–256. doi:10.1007/978-3-642-83822-4
[32]. Malikov, Z. M., Mirzoev, A. A., & Madaliev, M. (2022). Numerical simulation of the mixing layer problem based on a new two-fluid turbulence model. Journal of Computational Applied Mechanics, 53(2), 282-296.
[33]. Coles, D. E. The law of the wake in the turbulent boundary layer. J. Fluid Mech. 1, 191–226, 1956.
[34]. Coles, D. The turbulent boundary layer in a compressible fluid. J. Fluid Mech. 1, 191. Rep.R-403-PR, Rand Corp., Santa Monica, California,1962.
[35]. Batchelor, G.K. Introduction to Fluid Dynamics / G.K. Batchelor. — Cambridge: Cambridge University Press, 1967. — 615 p.
[36]. Pope, S.B. Turbulent Flows / S.B. Pope. — Cambridge: Cambridge University Press, 2000. — 780 p.
[37]. Schlichting, G., Gersten, K. Boundary Layer Theory / G. Schlichting, K. Gersten. — 9th ed. — Berlin: Springer, 2017. — 815 p.
[38]. Davidson, P.A. Turbulence: An Introduction for Scientists and Engineers / P.A. Davidson. — Oxford: Oxford University Press, 2004. — 656 p.
[39]. Kundu, P. K., Cohen, I. M., Dowling, D. R. Fluid Mechanics / P. K. Kundu, I. M. Cohen, D. R. Dowling. — 6th ed. — London: Academic Press, 2015. — 1024 p.
[40]. Hinze, J. O. Turbulence / J. O. Hinze. — New York: McGraw-Hill, 1975. — 790 p.
[41]. White, F. M. Viscous Fluid Flow / F. M. White. — 3rd ed. — New York: McGraw-Hill Education, 2006. — 614 p.
[42]. Williams, F. A. Combustion Theory / F. A. Williams. — 2nd ed. — Benjamin-Cummings Publishing, 2018. — 524 p.